

# Combi steamer

Project \_\_\_\_\_  
 Item \_\_\_\_\_  
 Quantity \_\_\_\_\_  
 FCSI section \_\_\_\_\_  
 Approval \_\_\_\_\_  
 Date \_\_\_\_\_

mini 6.06

## Model

Convotherm mini Standard

- Standard
- 6 Shelves GN 2/3
- Electric
- Injection/Spritzer
- Right-hinged door



## Key features

- Operating modes: Steam, Combi-steam, Convection
- Extra functions:
  - Crisp&Tasty – 3 moisture-removal settings
  - Reduced fan speed and auto-reverse mode (not with special voltages)
- Manual control – digital tilt selector switch for easy temperature, time and core temperature settings
- Semi-automatic cleaning system
- Steam generated by injecting water into the cooking chamber
- Right-hinged appliance door

## Standard features

- Operating modes:
  - Steam (30-120°C) with guaranteed steam saturation
  - Combi-steam (100-250°C) with automatic humidity adjustment
  - Convection (30-250°C) with optimized heat transfer
- Default user interface:
  - Press&Go quick selection buttons
  - Digital display
  - Regenerating function – regenerates products to their peak level
  - Program list for saving your own cooking profiles
- Multi-point core temperature probe
- Robust door latch handle with sure-shut function
- Preheat and cool down function
- Flexible shelf spacing
- Vapour reduction
- RS-232 port





## Options

- ConvoClean system – fully automatic cleaning system (cleaning levels, 1 to 4, CareStep)
- Exterior design in black on stainless steel
- Left-hinged appliance door
- mini mobil – with built-in water and wastewater drawers; no fixed water supply connection required (see separate data sheet)
- Marine version
- Available in various voltages

## Accessories

- Hand shower with smooth flow control
- ConvoLink – HACCP and cooking profile management PC software
- ConvoVent mini condensation hood
- Stands in various sizes and designs
- Stacking kits
- Care products for the ConvoClean system fully automatic cleaning system

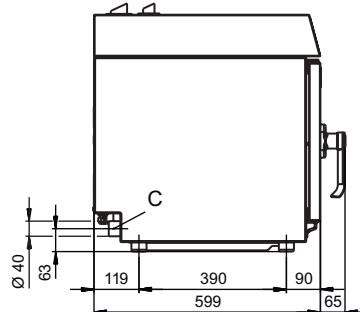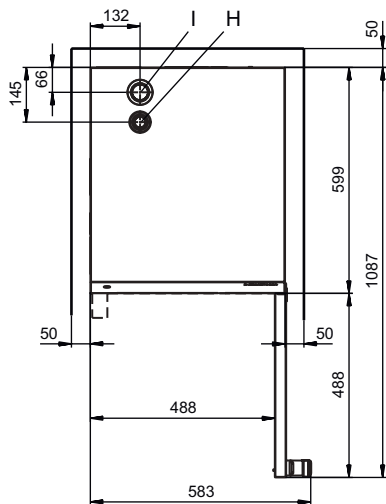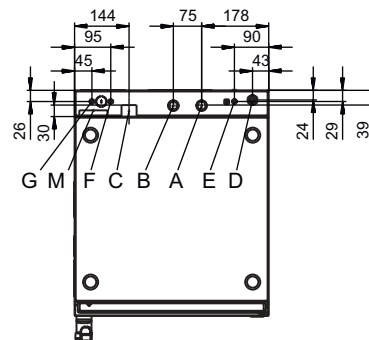

**Front view**

**Side view**

**View from above with wall clearances**

**Connection points**


- A Water-supply connection (for water injection)
- B Water-supply connection (for cleaning)
- C Drain connection DN 40
- D Electrical connection
- E Equipotential bonding
- F Rinse-aid connection
- G Cleaning-agent connection
- H Air vent Ø 30 mm
- I Ventilation port Ø 43 mm
- M Safety overflow 60 mm x 20 mm

## Dimensions and weights

Dimensions including packaging

Width x Height x Depth 580 x 830 x 740 mm

Weight

Empty weight without packaging 45 kg

Weight of packaging 12 kg

Safety clearances\*

Rear 50 mm

Right 50 mm

Left (larger gap recommended for servicing) 50 mm

Top\*\* 500 mm

\* Minimum distance from heat sources: 500 mm.

\*\* Depends on type of air ventilation system and nature of ceiling.

## Installation instructions

Absolute tilt of unit in operation max. 2° (3.5%)

## Loading capacity

|                                |       |
|--------------------------------|-------|
| Max. number of food containers |       |
| GN 2/3 depth 40 mm             | 6     |
| GN 2/3 depth 65 mm             | 4     |
| Plates max. Ø 28 cm,           | 4     |
| Maximum loading weight         |       |
| GN 1/1, per combi steamer      | 13 kg |
| GN 1/1, per shelf level        | 5 kg  |

## Electrical supply

|                                     |         |
|-------------------------------------|---------|
| 3N~ 400V 50/60Hz (3/N/PE)           |         |
| Rated power consumption             | 5.7 kW  |
| Convection power                    | 5.4 kW  |
| Motor power                         | 0.25 kW |
| Rated current                       | 11.8 A  |
| Fuse rating                         | 16A     |
| Recommended conductor cross-section | 5G2.5   |
| 3~ 230V 50/60Hz (3/PE)              |         |
| Rated power consumption             | 5.7 kW  |
| Convection power                    | 5.4 kW  |
| Motor power                         | 0.25 kW |
| Rated current                       | 23.5 A  |
| Fuse rating                         | 25 A    |
| Recommended conductor cross-section | 4G4     |
| 1N~ 230V 50/60Hz (1/N/PE)           |         |
| Rated power consumption             | 3.0 kW  |
| Convection power                    | 2.7 kW  |
| Motor power                         | 0.25 kW |
| Rated current                       | 13.1 A  |
| Fuse rating                         | 16 A    |
| Recommended conductor cross-section | 3G2.5   |
| 3~ 200V 50/60Hz (3/PE)              |         |
| Rated power consumption             | 5.7 kW  |
| Convection power                    | 5.4 kW  |
| Motor power                         | 0.25 kW |
| Rated current                       | 17.1 A  |
| Fuse rating                         | 20 A    |
| Recommended conductor cross-section | 5G2.5   |

## Water connection

|                                          |                                                     |
|------------------------------------------|-----------------------------------------------------|
| Water supply                             |                                                     |
| Shut-off device                          | With EA (verifiable) check valve and dirt filter    |
| Water supply                             | 2 x G 3/4", Fixed connection recommended            |
| Flow pressure, without ConvoClean system | 200 - 600 kPa (2 - 6 bar)                           |
| Flow pressure, with ConvoClean system    | 300 - 600 kPa (3 - 6 bar)                           |
| Appliance drain                          |                                                     |
| Drain version                            | Fixed connection (recommended) or funnel waste trap |
| Type                                     | DN 40                                               |

## Water quality

|                                                |                                                                                    |
|------------------------------------------------|------------------------------------------------------------------------------------|
| Water-supply connection A* for water injection |                                                                                    |
| General requirements                           | Drinking water, typically soft water (install water treatment system if necessary) |
| General hardness                               | 4 - 7 °dh / 70 - 125 ppm / 7 - 13 °TH / 5 - 9 °e                                   |
| Water connection B* for cleaning               |                                                                                    |
| General requirements                           | Drinking water, typically hard water                                               |
| General hardness                               | 4 - 20 °dh / 70 - 360 ppm / 7 - 35 °TH / 5 - 25 °e                                 |
| Water-supply connections A, B*                 |                                                                                    |
| pH value                                       | 6.5 - 8.5                                                                          |
| Cl <sup>-</sup> (chloride)                     | max. 60 mg/l                                                                       |
| Cl <sub>2</sub> (free chlorine)                | max. 0.2 mg/l                                                                      |
| SO <sub>4</sub> <sup>2-</sup> (sulphate)       | max. 150 mg/l                                                                      |
| Fe (iron)                                      | max. 0.1 mg/l                                                                      |
| NH <sub>2</sub> Cl (monochloramine)            | max. 0.2 mg/l                                                                      |
| Temperature                                    | max. 40 °C                                                                         |
| Electrical conductivity                        | min. 20 µS/cm                                                                      |

\* See diagram of connection points, page 2.

## Water consumption

Water-supply connection A\*

Ø Consumption for cooking 0 - 15 l/h

Max. water flow rate 0.5 l/min

Water-supply connections A, B with ConvoClean system

Ø Consumption for cooking\*\* 0 - 20 l/h

Max. water flow rate 7 l/min

\* Values for selecting the capacity of the water treatment system.

\*\* Including water used for cooling the wastewater.

PLEASE NOTE: See diagram of connection points, page 2.

## Emissions

Dissipated heat\*

Latent heat 1000 kJ/h / 0.28 kW

Sensible heat 1100 kJ/h / 0.31 kW

Waste water temperature max. 80 °C

Noise during operation max. 70 dBA

\* The dissipated heat values were measured as per DIN 18873-1 "Methods for measuring the energy use of equipment for commercial kitchens — Part 1". The type and frequency of appliance usage are decisive for the specification of an air conditioning and ventilation system. These values can be higher than the values indicated for dissipated heat. Guide values can be found in the technical literature, e.g. in VDI 2052.

Please consult your specialized design engineer for planning an air conditioning and ventilation system.

Please observe the following points:

- This document is to be used solely for planning purposes.
- Please refer to the Installation manual for further technical data and guidance on installation and positioning.

## ACCESSORIES

(Please refer to the Accessories brochure for detailed information)

### Condensation hood ConvoVent mini

Electrical supply

Rated voltage 1N~ 230V 50/60Hz

Rated power consumption 60 W

Rated current 0.26 A

Fuse rating 16 A

Dimensions excluding packaging

Width x Height x Depth 515 x 135 x 564 mm

Weight excluding packaging 17 kg

Safety clearance above\*\* 500 mm

\*\* Depends on type of air ventilation system and nature of ceiling.

### Stacking kits

Stacking kit unit

Permitted combinations mini 6.06 on the bottom, mini 6.06 on top  
mini 6.10 on the bottom, mini 6.06 on top  
mini 6.10 on the bottom, mini 6.10 on top  
mini 10.10 on the bottom, mini 6.10 on top

Stacking kit unit with compartment for cleaning agent canister, on casters

Permitted combinations mini 6.06 on the bottom, mini 6.06 on top  
mini 10.10 on the bottom, mini 10.10 on top