



STANDARD FEATURES

- Fully assembled machines, ready to install
- Everlasting machines, completely built in steel
- Double skin door and security door
- Easy-to-use machines with fully automatic process
- Built with aid pump in rinse
- Deep-drawn and inclined tank for a perfect total drain
- Integrated suction/discharge circuit, for total draining
- Racks for glasses, dishes and cutlery included
- Thermostop system

RACK EQUIPMENT


- 1 rack C40
- 1 rack C44
- 1 rack 15060


OPTIONAL

- Extra power (GS 50 ECO)
- Drain pump (GS 50 ECO)
- Water softner (GS 50 ECO)
- Detergent dispenser
- Cold rinse
- Booster pump

TECHNICAL SPECIFICATIONS

Dimensions: 590X600X850H mm
 Pwer Supply: 400 V 3N 50 Hz / 230 Vac ~ 50 Hz (ECO)
 Rack/h: 30 (eau d'alimentation 50°C)
 Rack dimension: 500x500 mm
 Power required: 5150 W / 3450W (ECO)



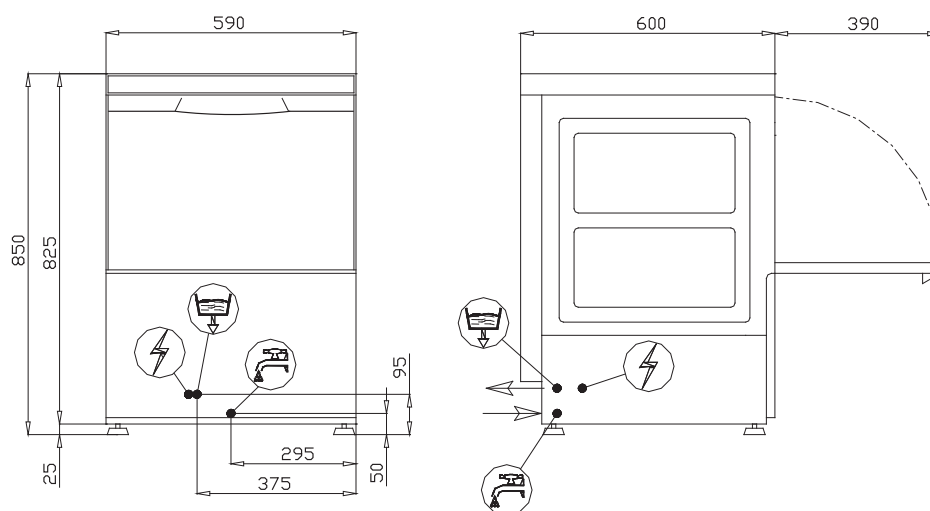

TECHNICAL DATA	GS 50		GS 50 D		GS 50 ECO
WEIGHT	56.5 Kg		56.5 Kg		56.5 Kg
POWER REQUIRED	5150 W		5150 W		3450 W
WATER HARDNESS	2-8 °F		2-8 °F		2-8 °F
INLET WATER PRESSURE	200-400 kPa		200-400 kPa		200-400 kPa
CROCKERY DIMENSIONS					
PLATES DIAMETER	345 mm		345 mm		345 mm
DISHES MAX. HEIGHT	320 mm		320 mm		320 mm
WASHING CYCLES	1 (120)	2 (180)	1 (120)	2 (180)	1 (120)
WATER SUPPLY 55°C					
RACKS/H (*) (1)	30 p/h	20 p/h	30 p/h	20 p/h	30 p/h
WATER SUPPLY 10°C					
RACKS/H (*) (1)	21 p/h	20 p/h	21 p/h	20 p/h	14 p/h
WATER CONSUMPTION / CYCLE (water pressure 200kpa)	2.3 L		2.3 L		2.3 L
BOILER CAPACITY	5.7 L		5.7 L		5.7 L
BOILER HEATING ELEMENT	4500 W		4500 W		2800 W
RINSING TEMPERATURE (SET)	85 °C		85 °C		85 °C
TANK CAPACITY	29 L		29 L		29 L
TANK HEATING ELEMENT	2700 W		2700 W		2700 W
TANK TEMPERATURE (SET)	55 °C		55 °C		55 °C
PUMP POWER	650 W (340 L/min***)		650 W (340 L/min***)		650 W (340 L/min***)
DRAIN PUMP (optional)	25 W h MAX vidange 0.8m (40 L/min***)		25 W h MAX vidange 0.8m (40 L/min***)		----
NOISE	63 dB(A)±0.7		63 dB(A)±0.7		63 dB(A)±0.7

(*) standard termostop (***) maximum flow rate

1) In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.

Warning: Plumbing and electrical connection should be made by qualified personnel who will observe all the applicable plumbing, sanitary and safety codes and the National Electrical Code. Continual improvements may supersede specifications